

关于卧龙

1984

30

“


\$

卧龙集团

产品介绍

1Ph 230VAC 50/60Hz				
0.15kW~0.3kW				
≥ 0.6				
-25	60	-40		
-30~40				
0-10V	RS485			
B3	B30	B14		
IP20	IP44	IP55	IP66	
C3-H	C4-H			
UL	CE	CCC		

		[V]		[Hz]		[kW]		[r/min]				[A]		[%]	
EM4210A15***		1~220-240		50/60		0.15		720/960/1000/1050/1200				200~1200		1.4 80%	
EM4210A13***		1~220-240		50/60		0.25		720/960/1000/1050/1200				200~1200		2.1 81%	
EM4210A12***		1~220-240		50/60		0.37		960/1000/1050/1200				200~1200		2.8 82%	
EM4210B15***		1~220-240		50/60		0.15		1350/1500/1800/2200				200~2200		1.5 81%	
EM4210B13***		1~220-240		50/60		0.25		1350/1500/1800/2200				200~2200		2.2 82%	
EM4210B12***		1~220-240		50/60		0.3		1350/1500/1800/2200				200~2200		3 83%	
	A	B	C		D	E		H	K	L	AB	AC	BB	EB	HD
42	112	90	45	12.7	15/17/20	/		71	8.5	244	135	102.5	110	/	135

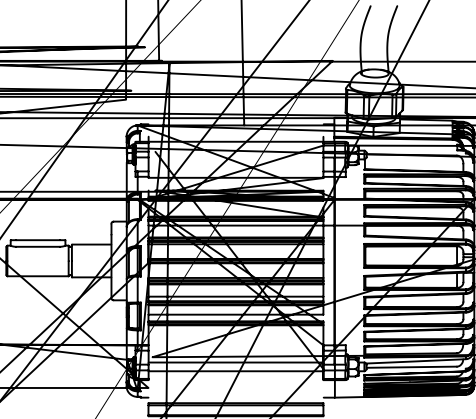


3Ph 380~480VAC 50/60Hz				
1.1	2.2kW			
≥ 0.9				
-25	~55		-40	
30~40				
0-10V	RS485			
B3	B30	B14		
IP55	IP66			
C3-H	C4-H			
UL	CE			

	[V]		[Hz]	[kW]		[r/min]						[A]	[%]
EM5610A32***	3~380-480V		50/60	1.1		720/960/1000/1050/1200				200~1200		2.4	86%
EM5610A21***	3~380-480V		50/60	1.5		720/960/1000/1050/1200				200~1200		3.2	87%
EM5610A31***	3~380-480V		50/60	2.2		960/1000/1050/1200				200~1200		4.5	88%
EM5610B32***	3~380-480V		50/60	1.1		1350/1500/1800/2200				200~2200		2.4	88%
EM5610B21***	3~380-480V		50/60	1.5		1350/1500/1800/2200				200~2200		3.2	89%
EM5610B31***	3~380-480V		50/60	2.2		1350/1500/1800/2200				200~2200		4.5	90%
	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD
56	140	100	/	20/24	/	90/100	11	/	180	138.5	130	/	141

1Ph 115, 230,460VAC 3Ph 380~480VAC 50/60Hz			
1/4~1HP,max 1kW			
≥ 0.7			
-20	~55	-40	-30~40
0-10V RS485 PWM			
B3 B30			
IP20 IP44 IP55 IP66			
C3-H C4-H			
UL CE CCC			


	[V]	[Hz]	[HP]	[r/min]		[A]	[%]
EM4810B14***	1~115/230	50/60	1/4	720/960/1000/1050/1200	200~1200	3.1/1.8	81%
EM4810B12***	1~115/230	50/60	1/3	720/960/1000/1050/1200	200~1200	3.6/2.4	82%
EM4810B12***	1~115/230	50/60	1/2	720/960/1000/1050/1200	200~1200	5.9/3.3	82%
EM4810A34***	1~115/230	50/60	3/4	720/960/1000/1050/1200	200~1200	8/4.68	83%
EM4810A11***	1~115/230	50/60	1	960/1000/1050/1200	200~1200	9.5/5.8	84%
EM4810D14***	1~115/230	50/60	1/4	1350/1500/1800	200~1800	3.7/1.7	82%
EM4810D12***	1~115/230	50/60	1/3	1350/1500/1800	200~1800	4/2.2	83%
EM4810D12***	1~115/230	50/60	1/2	1350/1500/1800	200~1800	5.9/3.2	83%
EM4810C34***	1~115/230	50/60	3/4	1350/1500/1800	200~1800	8.4/4.5	85%
EM4810C11***	1~115/230	50/60	1	1350/1500/1800	200~1800	10.7/5.9	86%
EM4810E14***	1~460~480	50/60	1/4	1000/1050/1200/1500/1800	120~1800	0.85	83%
EM4810E12***	1~460~480	50/60	1/3	1000/1050/1200/1500/1800	120~1800	1.6	86%
EM4810E12***	1~460~480	50/60	1/2	1000/1050/1200/1500/1800	120~1800	1.6	86%
EM4810E34***	1~460~480	50/60	3/4	1000/1050/1200/1500/1800	120~1800	2.25	87%
EM4810E11***	1~460~480	50/60	1	1000/1050/1200/1500/1800	120~1800	3	88%

	[V]	[Hz]	[HP]	[r/min]		[A]	[%]
EM4810F14***	3~380~480	50/60	1/4	1000/1050/1200/1500/1800	120~1800	0.52~0.45	84%
EM4810F12***	3~380~480	50/60	1/3	1000/1050/1200/1500/1800	120~1800	0.95~0.84	87%
EM4810F12***	3~380~480	50/60	1/2	1000/1050/1200/1500/1800	120~1800	0.95~0.84	87%
EM4810F34***	3~380~480	50/60	3/4	1000/1050/1200/1500/1800	120~1800	1.33~1.16	88%
EM4810F11***	3~380~480	50/60	1	1000/1050/1200/1500/1800	120~1800	1.77~1.52	89%
	D	E	F	L		AG	DA
48	12.7/15/17/20	/	/	/		143	/

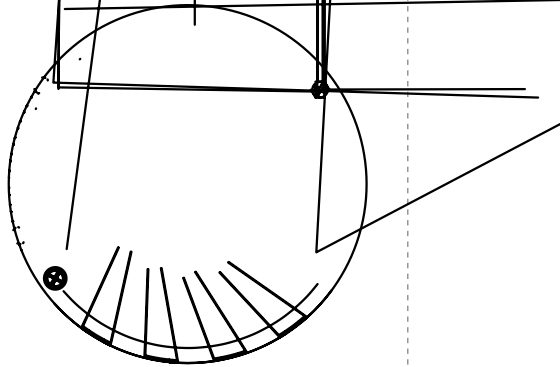

3Ph 380~480VAC 50/60Hz
3 7.5kW
≥ 0.9
-25 ~-55
-30~40
0-10V RS485
B3 B30 B14
IP55 IP66
C3-H C4-H
UL CE


	[V]		[kW]	[r/min]							
EM16010A112***	3~380-480V		4	50/1200	200~1200	8					
EM16010A071***	3~380-480V		5.5	50/1200	200~1200					81%	
EM16010A101***	3~380-480V		7.5	50/1200	200~1200					91.6%	
EM16010B112***	3~380-480V	10	4	50/2200	200~2200					91.3%	
EM16010B071***	3~380-480V	60	5.5	50/2200	200~2200	11				92%	
EM16010B101***	3~380-480V	60	7.5	50/2200	200~2200	15				92.7%	
	A	B		D	E	H	AC	BB	EB	HD	
160T	254	160		42	/	160	304	303	200	/	313

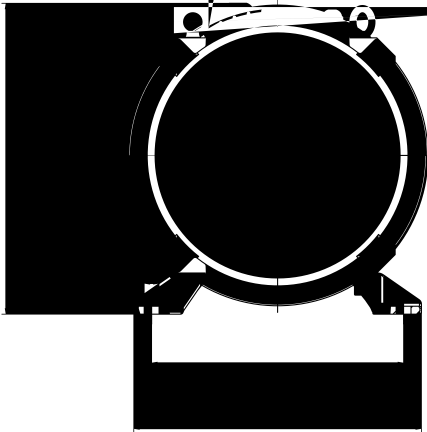

应用案例 -EM42

3~230VAC 50/60Hz
0.25kW
≥ 0.7
-20 ~-60
-30~40
-40

					[A]	[%]
ZWB**10**	220-240	50/60			2.1	81%

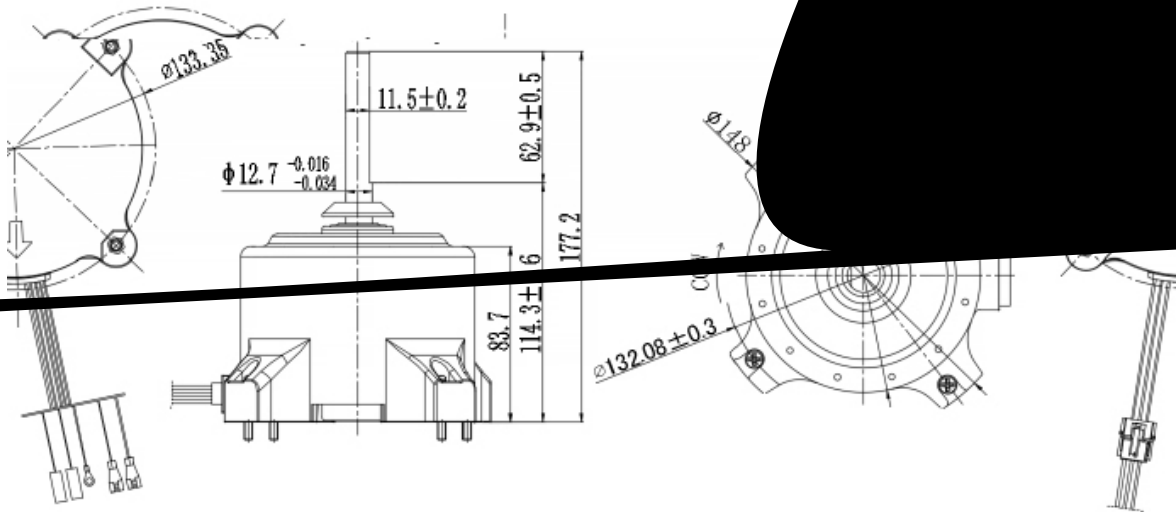

※ 电机轴径，轴长及引线长度可定制



