

关于卧龙

1984

30

“

σ

0

1


,

卧龙集团

产品介绍


1Ph 230VAC 50/60Hz				
0.15kW~0.3kW				
≥ 0.6				
-25	60	-40		
-30~40				
0-10V	RS485			
B3	B30	B14		
IP20	IP44	IP55	IP66	
C3-H	C4-H			
UL	CE		CCC	

	[V]		[Hz]	[kW]		[r/min]					[A]		[%]	
EM4210A15***	1~220-240		50/60	0.15		720/960/1000/1050/1200			200~1200		1.4		80%	
EM4210A13***	1~220-240		50/60	0.25		720/960/1000/1050/1200			200~1200		2.1		81%	
EM4210A12***	1~220-240		50/60	0.37		960/1000/1050/1200			200~1200		2.8		82%	
EM4210B15***	1~220-240		50/60	0.15		1350/1500/1800/2200			200~2200		1.5		81%	
EM4210B13***	1~220-240		50/60	0.25		1350/1500/1800/2200			200~2200		2.2		82%	
EM4210B12***	1~220-240		50/60	0.3		1350/1500/1800/2200			200~2200		3		83%	
	A	B	C	D		E	H	K	L	AB	AC	BB	EB	HD
42	112	90	45	12.7/15/17/20		/	71	8.5	244	135	102.5	110	/	135

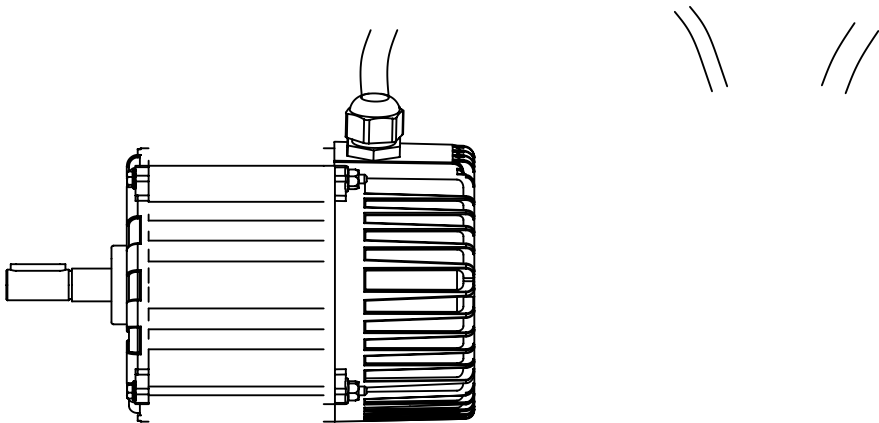

3Ph 380~480VAC 50/60Hz				
1.1		2.2kW		
≥ 0.9				
-25		~55		-40
-30~40				
0-10V		RS485		
B3	B30	B14		
IP55		IP66		
C3-H		C4-H		
UL		CE		

		[V]	[Hz]	[kW]		[r/min]					[A]	[%]	
EM5610A32***		3~380-480V	50/60	1.1		720/960/1000/1050/1200			200~1200		2.4	86%	
EM5610A21***		3~380-480V	50/60	1.5		720/960/1000/1050/1200			200~1200		3.2	87%	
EM5610A31***		3~380-480V	50/60	2.2		960/1000/1050/1200			200~1200		4.5	88%	
EM5610B32***		3~380-480V	50/60	1.1		1350/1500/1800/2200			200~2200		2.4	88%	
EM5610B21***		3~380-480V	50/60	1.5		1350/1500/1800/2200			200~2200		3.2	89%	
EM5610B31***		3~380-480V	50/60	2.2		1350/1500/1800/2200			200~2200		4.5	90%	
	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD
56	140	100	/	20/24	/	90/100	11	/	180	138.5	130	/	141



3Ph 380~480VAC 50/60Hz		
1.5	3kW	
≥ 0.9		
-25	~55	-40
-30~40		
0-10V	RS485	
B30		
IP55	IP66	
C3-H	C4-H	
UL	CE	

	[V]	[Hz]	[kW]	[r/min]		[A]	[%]
EM13210A31***	3~380-480V	50/60	1.5	720/960/1000/1200	200~1200	3.0~2.4	89%
EM13210A31***	3~380-480V	50/60	1.8	720/960/1000/1200	200~1200	3.5~2.9	89%
EM13210A31***	3~380-480V	50/60	2.2	720/960/1000/1200	200~1200	4.3~3.5	90%
EM13210A72***	3~380-480V	50/60	2.6	960/1000/1200	200~1200	5.0~4.0	90%
EM13210A41***	3~380-480V	50/60	3.0	960/1000/1200	200~1200	5.8~4.5	90%
EM13210B31***	3~380-480V	50/60	1.5	1300/1450/1500/1800	200~1800	3.0~2.4	90%
EM13210B31***	3~380-480V	50/60	1.8	1300/1450/1500/1800	200~1800	3.5~2.9	90%
EM13210B31***	3~380-480V	50/60	2.2	1300/1450/1500/1800	200~1800	4.3~3.5	91%
EM13210B72***	3~380-480V	50/60	2.6	1300/1450/1500/1800	200~1800	5.0~4.0	91%
EM13210B41***	3~380-480V	50/60	3.0	1300/1450/1500/1800	200~1800	5.8~4.5	91%

3Ph	380~480VAC	50/60
3	7.5kW	
≥	0.9	
-25	~55	
-30~40		
0-10V	RS485	
B3	B30	B14
IP55	IP66	
C3-H	C4-H	
UL	CE	

	[V]	[Hz]	[r/min]	[A]
EM16010A112***	3~380-480	50/60	1000/1050/1200	1~1.100
EM16010A071***	3~380-480	50/60	1000/1050/1200	200~1.100
EM16010A101***	3~380-480	50/60	1050/1200	1~1.100
EM16010B112***	3~380-480	50/60	1000/2200	1~1.100
EM16010B071***	3~380-480	50/60	1000/2200	92~1.100
EM16010B101***	3~380-480	50/60	1000/2200	92~1.100

	A	B	D	AC	B	EB
160T	254	160	100	100	100	100

※ 电机轴径，轴长及引线长度可定制

